

ELECTRONICS DIVISION

LIONFISH® 12.7 Ultralight



The LIONFISH® 12.7 Ultralight is a remotely-controlled small caliber naval gun system which stands out for the lightest weight, the smallest deck interface and the best trade-off between performances and price.

The LIONFISH® 12.7 Ultralight can be efficiently used onboard small surface vessel, thanks to its physical characteristics, for border control, maritime traffic interdiction and self-protection as well as in land applications.

The LIONFISH® 12.7 Ultralight is fitted with a 12.7 mm machine gun feed by a 250 ready to fire rounds magazine, compatible with a wide variety of 12.7 x 99 NATO standard ammunitions such as: AP, API, APT, APIT, M33 ball.

The aiming system is fully stabilized in elevation and azimuth by means of powerful servo-systems in closed loop with both two independent gyros and two tachometers for redundancy.



The LIONFISH® 12.7 Ultralight is remotely controlled through its own Local Control Console and it is able to autonomously determine the stabilized firing coordinates by performing ballistic and target trajectory calculations.

The Electro-Optical Director is constituted of an accurate sensors suite (with an automatic tracking functionality) constituted of a daylight camera, an IR camera and a LASER Range Finder.

In emergency conditions, proper handles, located in the rear part of the cradle, allow to manually move the turret and fire.

KEY FEATURES

- Effective against any asymmetric surface threats, helicopters and drones;
- lightest weight and smallest deck interface;
- fully stabilized on two independent axes providing great accuracy;
- high dynamic performances;
- high reliability and ease of maintenance;
- innovative and user-friendly Local Control Console;
- no deck penetration;
- logistic communality inside LIONFISH® family;
- emergency manual controls

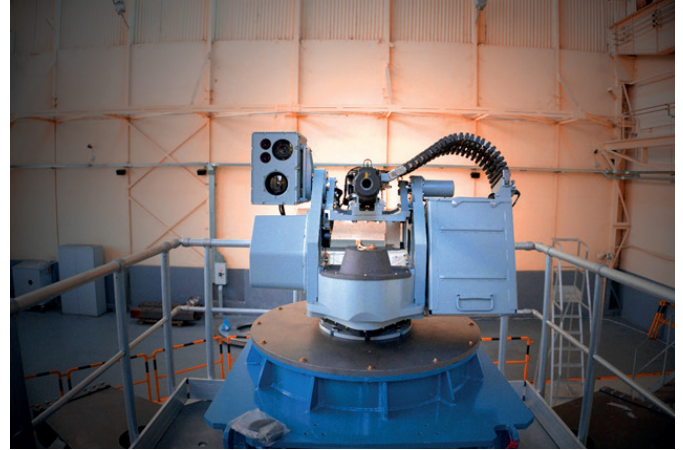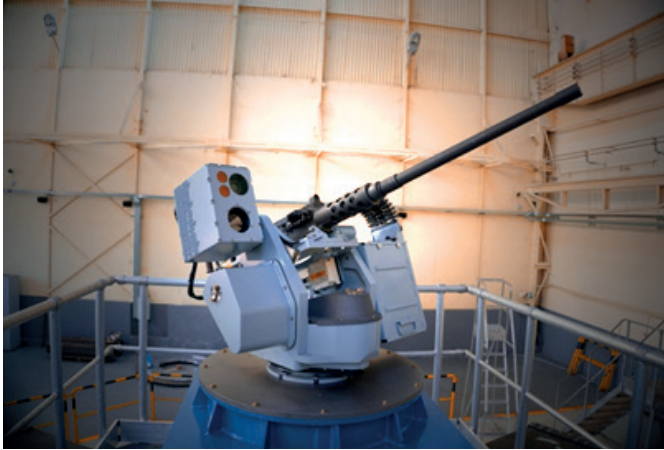

TECHNICAL SPECIFICATIONS

- Caliber 12.7 x 99 NATO
- Rate of fire (1) single shot, 300 RPM, 485 to 635 RPM
- Ready to fire rounds 250
- Effective range 1500 m
- Training range -155° to 155°
- Elevation range -20°÷70°
- Training and elevation speed 60°/s (150°/s2)
(acceleration)
- Mass without ammunition <180 Kg
- Day Camera (2) 9.5 / 4.8 / 2.7 Km
D / R / I
- IR Camera (2) 6.3 / 3.0 / 1.5 Km
D / R / I
- LRF (2) 5.5 Km

(1): Depending on the used machine gun.

(2): Typical performances achieved with respect to a NATO standard target.



For more information:
infomarketing@leonardo.com

Electronics Division
Via Valdilocchi 15 - 19136 La Spezia-Italy
T +39 0187 5811 - F +39 0586 854060



leonardo.com

This publication is issued to provide outline information only and is supplied without liability for errors or omissions. No part of it may be reproduced or used unless authorised in writing. We reserve the right to modify or revise all or part of this document without notice.

2020 © Leonardo S.p.A.

EL-00006 04-23

