

NERIO-LR

LONG RANGE SURVEILLANCE AND THREAT ACQUISITION SYSTEM



NERIO-LR is a state of the art modular Electro-Optical (EO) Surveillance, Threat Acquisition (STA) and Reconnaissance system designed to satisfy a broad range of current and emerging customer requirements.

These include:

- Border security and Critical National Infrastructure protection
- Vehicle based STA and Reconnaissance operational from both wheeled and tracked vehicle platforms
- Coastal surveillance
- Ship borne STA and Situation Awareness

NERIO-LR integrates world-class EO sensors as part of a fully flexible payload configuration together with a gyro-stabilised director mechanism enabling capability, cost and performance to be optimised according to specific customer needs.

Utilising the SLX-Hawk Thermal Imaging (TI) camera for provision of a 24/7 operational capability, NERIO-LR combines a 24° to 1.8° TI zoom field of view with a 360° x

+60°/-90° system field of regard.

This breadth of imaging coverage and performance capability enables customers to conduct surveillance acquisition operations at both very short and long-range with a single EO system asset.

Performance of the SLX-Hawk TI camera enables the identification of threats at ranges typically beyond the effective range of the threat's typical weapon system.

Additionally to the SLX-Hawk TI camera, the standard NERIO-LR sensor payload configuration includes a colour day TV camera and optional, eye-safe Laser Rangefinder (LRF) to supplement the surveillance capability and enable the capability for geospatial threat location.

The modular payload and communication architecture of NERIO-LR enables the Day TV Camera and LRF solutions to be tailored to meet specific customer performance, cost and capability needs.

NERIO-LR is designed to facilitate use in direct or mast mounting to platforms, or static tower mounted applications. An optional Fast-Fit mast mount adaptor also enables NERIO-LR to be rapidly de-mounted from and re-mounted to mobile reconnaissance platforms enabling the system to be used off-platform as part of dismantled observation post operations if required.

KEY FEATURES AND CUSTOMER BENEFITS

GYRO-STABILISED EO PAYLOAD

Enables operation on moving platforms and optimised performance in mast/tower mounted applications.

CONTINUOUS 360° X +60°/-90° COVERAGE

Provides a solution for both close-in, e.g. urban canyons, and long-range surveillance and threat identification.

SLX-HAWK TI CAMERA

World-Class TI performance coupled with a full range continuous 24° to 1.8° zoom lens enabling high performance, 24/7 operation.

MODULAR PAYLOAD ARCHITECTURE

Enables the NERIO-LR system level capability to be optimised for customer specific cost, capability and performance needs and accommodate special to role payloads for specific operational applications.

OPEN-STANDARDS

Enables NERIO-LR to be easily interfaced with customer specific security or mission system solutions, including the UK MoDs GVA Defence Standard (via an external gateway).

RUGGED DESIGN

Enables NERIO-LR to be utilised against a broad range of operational requirements across a global environment, including; static or mobile and land or ship borne environment.

OPTIONAL CAPABILITIES

- Gyro stabilised or unstabilised variants are available
- Modular system control and display solutions
- Operational deployment solutions

TECHNICAL SPECIFICATION

Gyro-stabilised head

| | |
|---------------------------|-----------------------------|
| Field of regard | Continuous 360° x +60°/-90° |
| Angular speed | 60°/s (max) |
| Pointing accuracy | 0.06° 1σ in both axis |
| Stabilisation performance | 200μrad (1σ) |

SLX-HAWK thermal imager

| | |
|-----------------------|---|
| Resolution | 640 x 512 pixels |
| Operating waveband | 3μm to 5μm |
| Sensitivity | 17mK NETD (typical) |
| Optical field of view | Continuous zoom: 24° x 19° to 1.8° x 1.4° |

Colour day TV camera


| | |
|-----------------------|---|
| Resolution | 976 x 582 pixels |
| Optical field of view | Continuous zoom: 46° to 1.7° (horizontal) |
| Auto focus | On demand and zoom triggered |
| Sensitivity | 10mLux (25% video, f/1.9) |

Eyesafe LRF (optional)

| | |
|--------------|-------------|
| Laser type | Er Glass |
| Laser safety | Class 1 |
| Wavelength | 1540nm |
| Range | 80m to 20km |
| Accuracy | ±5m (1σ) |

System and environmental

| | |
|-----------------------------|----------------|
| Power supply | 18v-32v dc |
| Operating temperature range | -32°C to +71°C |

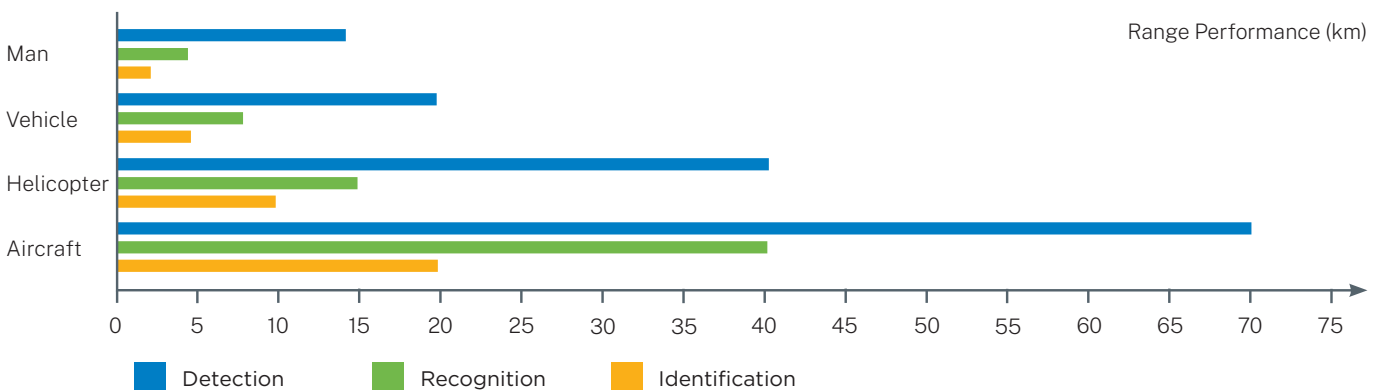

For more information:
infomarketing@leonardo.com

Leonardo Electronics
 Sigma House-Christopher Martin Road-Basildon-Essex SS14 3EL-United Kingdom
 T +44 (0) 1268 522822

This publication is issued to provide outline information only and is supplied without liability for errors or omissions.
 No part of it may be reproduced or used unless authorised in writing.
 We reserve the right to modify or revise all or part of this document without notice.

2024 © Leonardo UK Ltd

LDO_UK24_00894 6-24